

# DRS KABEL

## Specifications

Cross Section : 3x4mm<sup>2</sup> NYY (YVV-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :  
(mm) 13,7

Weight :  
(kg/km) 308


Conductor DS Resistance Ohm/km (20°C)

4,61

### Current Carrying Capacity

In Ground at 20 °C 47 A

In Air at 30 °C 34 A

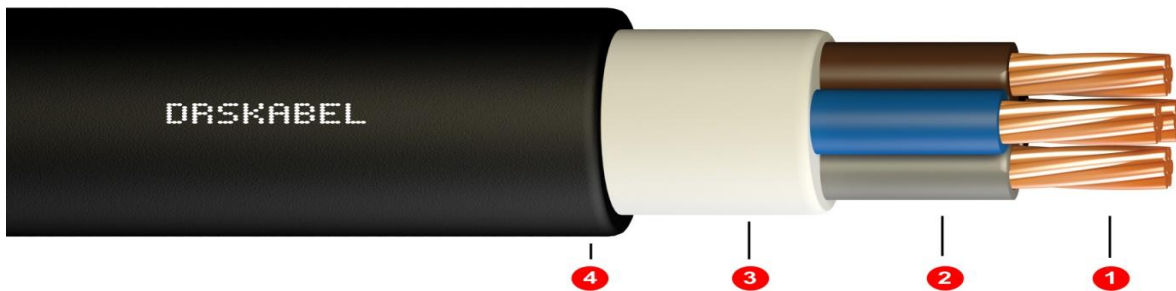

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	<b>Cu conductor</b>	Stranded copper	105,95	7x0,85mm
2	<b>Insulation</b>	Polyvinly chloride	50,06	Et Kal: 1,00mm thickness
3	<b>Filler</b>	Polyvinly chloride	65,39	Et Kal: 0,50mm thickness
4	<b>Outer sheath</b>	Polyvinly chloride	86,19	Et Kal: 1,50mm thickness