

# DRS KABEL

## Specifications

**Cross Section** : 4x10mm<sup>2</sup> NYY (YVV-R)

**Voltage** : 0,6/1kV (1,2kV)

**Diameter** :  
(mm) 18,5

**Weight** :  
(kg/km) 691


**Conductor DS Resistance** Ohm/km (20°C)

1,83

### Current Carrying Capacity

In Ground at 20 °C 79 A

In Air at 30 °C 60 A

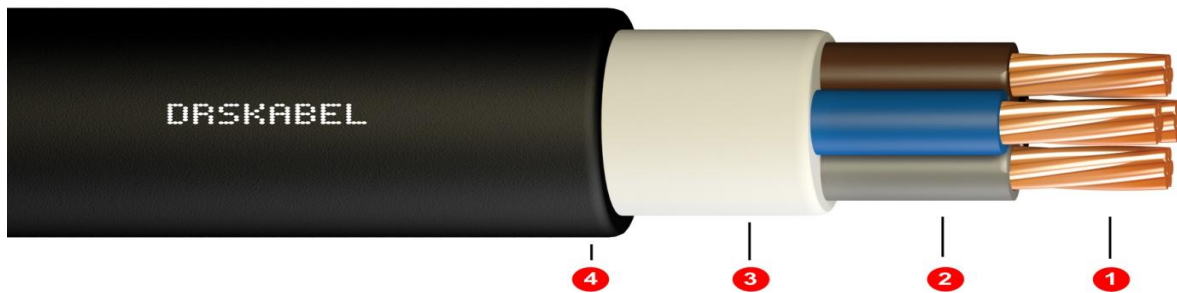

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	<b>Cu conductor</b>	Stranded copper	352,65	7x1,35mm
2	<b>Insulation</b>	Polyvinly chloride	95,56	Et Kal: 1,00mm thickness
3	<b>Filler</b>	Polyvinly chloride	122,9	Et Kal: 0,60mm thickness
4	<b>Outer sheath</b>	Polyvinly chloride	120,11	Et Kal: 1,50mm thickness