

DRS KABEL

Specifications

Cross Section : 4x50mm² NYY (YVV-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 31,2

Weight :
(kg/km) 2.624


Conductor DS Resistance Ohm/km (20°C)

0,387

Current Carrying Capacity

In Ground at 20 °C **188 A**

In Air at 30 °C **153 A**

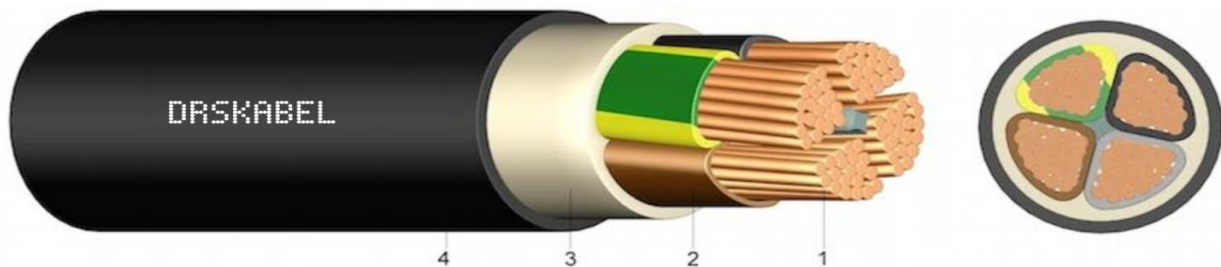

| Nr. | Construction | Property | Net Weight (kg/km) | Detail |
|-----|---------------------|--------------------|--------------------|--------------------------|
| 1 | Cu conductor | Stranded copper | 1660 | 10x2,62mm |
| 2 | Insulation | Polyvinly chloride | 262 | Et Kal: 1,40mm thickness |
| 3 | Filler | Polyvinly chloride | 472 | Et Kal: 0,80mm thickness |
| 4 | Outer sheath | Polyvinly chloride | 230 | Et Kal: 1,60mm thickness |