

DRS KABEL

Specifications

Cross Section : 4x70mm² NYY (YVV-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 35,7

Weight :
(kg/km) 3.611


Conductor DS Resistance Ohm/km (20°C)

0,268

Current Carrying Capacity

In Ground at 20 °C **232 A**

In Air at 30 °C **199 A**

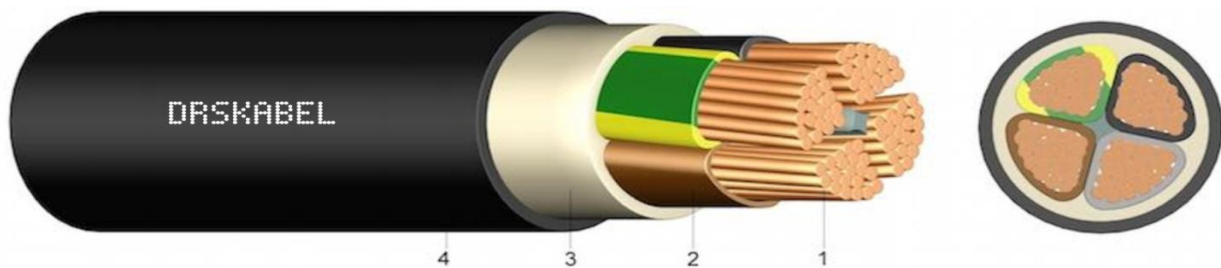

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper	2388	14x2,62mm
2	Insulation	Polyvinly chloride	307	Et Kal: 1,40mm thickness
3	Filler	Polyvinly chloride	620	Et Kal: 0,90mm thickness
4	Outer sheath	Polyvinly chloride	296	Et Kal: 1,80mm thickness