

DRS KABEL

Specifications

Cross Section : 5x25mm² NYY (YVV-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 26,5


Weight :
(kg/km) 1.820

Conductor DS Resistance Ohm/km (20°C)
0,727

Current Carrying Capacity

In Ground at 20 °C **145 A**

In Air at 30 °C **133 A**

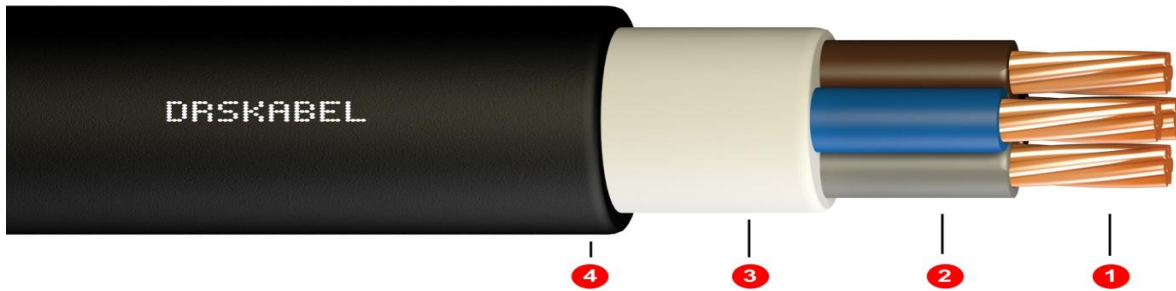

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper	1098	7x2,17mm
2	Insulation	Polyvinly chloride	208	Et Kal: 1,20mm thickness
3	Filler	Polyvinly chloride	331	Et Kal: 0,70mm thickness
4	Outer sheath	Polyvinly chloride	183	Et Kal: 1,50mm thickness