

DRSKABEL

TEKNİK ÖZELLİKLER / Specifications

Cross Section : 4x16mm² NYY (YVV-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 21,3

Weight :
(kg/km) 991


Conductor DS Resistance Ohm/km (20°C)

1,15

Current Carrying Capacity

In Ground at 20 °C **102 A**

In Air at 30 °C **80 A**

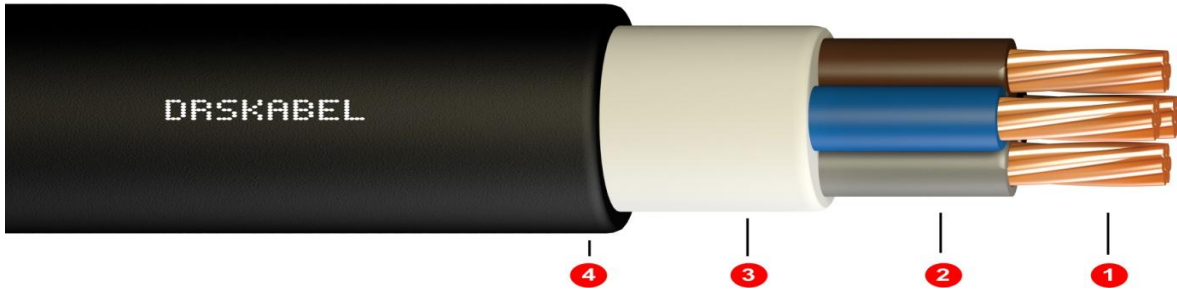

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper	557	7x1,73mm
2	Insulation	Polyvinly chloride	111	Et Kal: 1,00mm thickness
3	Filler	Polyvinly chloride	183	Et Kal: 0,90mm thickness
4	Outer sheath	Polyvinly chloride	140	Et Kal: 1,50mm thickness