

# DRSKABEL

## Specifications

**Cross Section** : 4x95mm<sup>2</sup> NYY (YVV-R)

**Voltage** : 0,6/1kV (1,2kV)

**Diameter** :  
(mm) 41,7

**Weight** :  
(kg/km) 4.916


**Conductor DS Resistance Ohm/km (20°C)**

0,193

### Current Carrying Capacity

*In Ground at 20 °C* **280 A**

*In Air at 30 °C* **246 A**

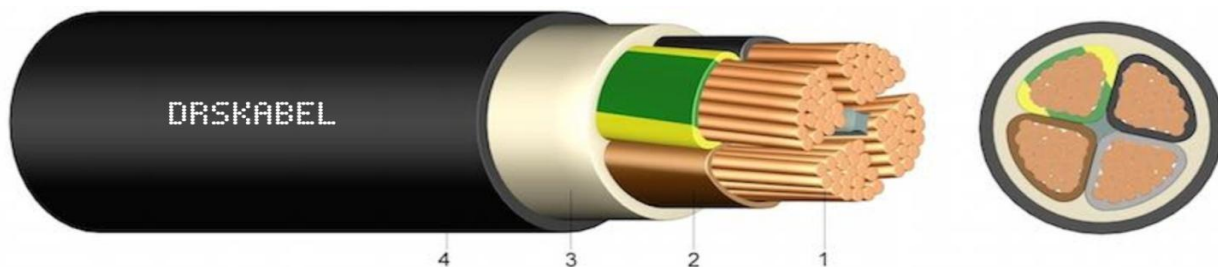

| Nr. | Construction        | Property           | Net Weight (kg/km) | Detail                   |
|-----|---------------------|--------------------|--------------------|--------------------------|
| 1   | <b>Cu conductor</b> | Stranded copper    | 3319               | 19x2,62mm                |
| 2   | <b>Insulation</b>   | Polyvinyl chloride | 411                | Et Kal: 1,60mm thickness |
| 3   | <b>Filler</b>       | Polyvinyl chloride | 824                | Et Kal: 1,00mm thickness |
| 4   | <b>Outer sheath</b> | Polyvinyl chloride | 362                | Et Kal: 1,90mm thickness |