

# DRS KABEL

## Specifications

**Cross Section** : 5x35mm<sup>2</sup> NYY (YVV-R)

**Voltage** : 0,6/1kV (1,2kV)

**Diameter** :  
(mm) 29,9

**Weight** :  
(kg/km) 2.410


**Conductor DS Resistance Ohm/km (20°C)**

0,524

### Current Carrying Capacity

*In Ground at 20 °C* **174 A**

*In Air at 30 °C* **162 A**

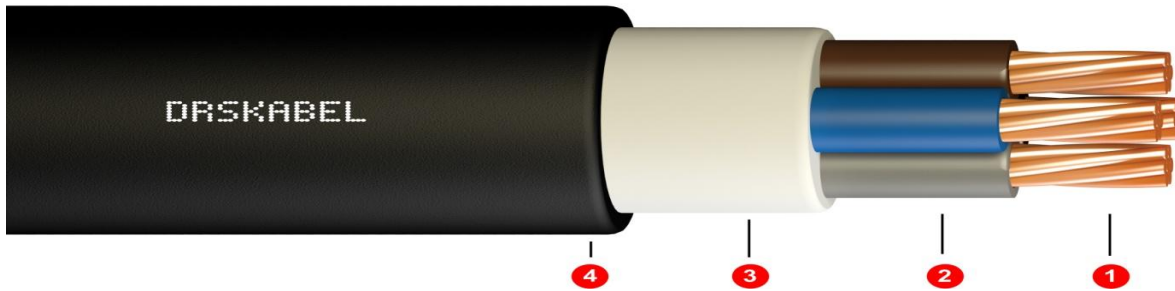

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	<b>Cu conductor</b>	Stranded copper	1527	7x2,62mm
2	<b>Insulation</b>	Polyvinly chloride	242	Et Kal: 1,20mm thickness
3	<b>Filler</b>	Polyvinly chloride	430	Et Kal: 0,80mm thickness
4	<b>Outer sheath</b>	Polyvinly chloride	211	Et Kal: 1,60mm thickness