

# DRS KABEL

## Specifications

**Cross Section** : 5x4mm<sup>2</sup> NYY (YVV-R)

**Voltage** : 0,6/1kV (1,2kV)

**Diameter** :  
(mm) 16,2

**Weight** :  
(kg/km) 486


**Conductor DS Resistance** Ohm/km (20°C)

4,61

### Current Carrying Capacity

*In Ground at 20 °C* 52 A

*In Air at 30 °C* 42 A

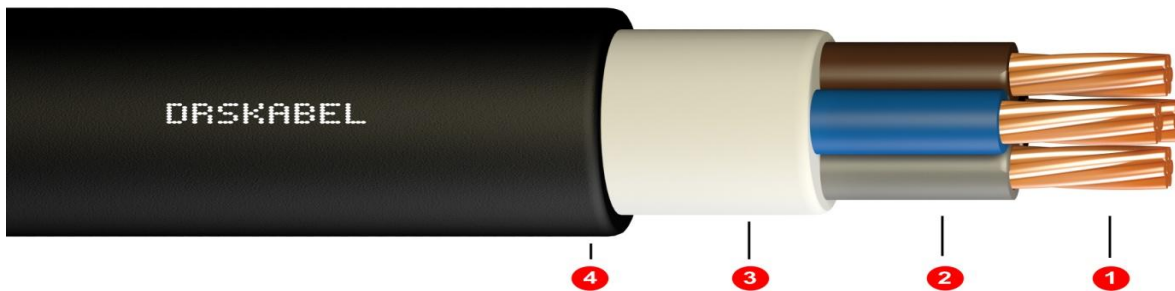

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	<b>Cu conductor</b>	Stranded copper	178	7x0,85mm
2	<b>Insulation</b>	Polyvinly chloride	88	Et Kal: 1,00mm thickness
3	<b>Filler</b>	Polyvinly chloride	112	Et Kal: 0,50mm thickness
4	<b>Outer sheath</b>	Polyvinly chloride	108	Et Kal: 1,50mm thickness